


Pump Initiation Boards

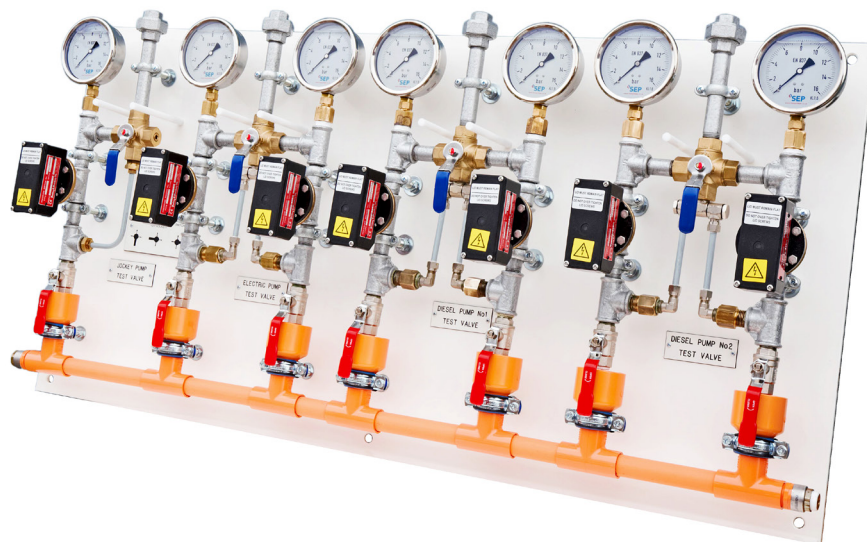

EN12845 style,
complete

Sale Engineering Products originally developed this compact, lightweight modular pump initiation board, designed to meet all the requirements of LPC, and BS5306 or BSEN12845 respectively.

The Sale Engineering Products Pump Initiation Board is often copied but never bettered.

The unit is directly mounted onto a polypropylene board for ease and speed of on-site installation. Each jockey and pump arrangement has a separate test assembly, complete with pressure switches, pressure gauges, test valves with control orifice all of which are connected to a common drain.

All materials supplied comply with PED 97/23/EC, and are fully pressure tested prior to despatch.

Our unique 4-port valve (EN12845 boards only) minimises the number of joints and makes testing and maintenance a painless task.

Key Features – BS5306 models

- Mounted on 9mm polypropylene board for ease of installation and zero corrosion/degradation.
- Inlet unions ½"/15nb BSP.
- Bailey & Mackey pressure switches 1381v & 1381.
- Glycerine filled pressure gauges with no loss connectors.
- Non-return valves on pump bypass (not jockey).
- Test valves with control orifice.
- ½" HQ pipe fittings and fully galvanised pipework.
- Descriptive labels provided to your requirements.
- Open (standard) or piped (to order) drain as required.
- From 2022 our BS5306 boards are even more compact.

Continued overleaf

Additional Features – EN12845 models

- Double switch arrangement for pumps as required by EN12845.
- Pump lines: 4-port valve allows easy testing of individual switches and gauges.
- Open drain assembly for easily visible water flow.

Why we think our EN Pump Initiation Board is the best:

- Our unique 4-port valve allows total isolation for maintenance - change gauges, switches and NRVs with ease when compared to many other board assemblies.
- Fewer joints than many boards, minimising the risk of leakage.
- Polypropylene board subject to zero corrosion.
- Orifice gate valves allow more accurate test measurement.
- Smaller weights and dimensions than competitor boards.

Pressure switch selection

Our initiation boards come as standard with 14, 28 or 42 bar pressure switches.

If the maximum pressure your system is subjected to is below 11 bar, you may request a special board using 11 bar switches (and, if required, gauges) since this will give you a slightly finer control and tolerance than the standard 14 bar switches.

Options/Upgrades

- Standard boards include 14 bar switches and 16 bar gauges.
- For higher pressures, pipework and switches/gauges suitable for either 25 bar or 40 bar.
- For lower pressures, we can provide 11 bar switches and 7 or 11 bar gauges.
- We can also manufacture with special switches such as Allen Bradley, Danfoss or even pressure transducers.

BS5306 style,
galvanised drain



BS5306 style,
high pressure



Description	Model	Standard Pressure*	Dimensions (HxW mm)
EN12845 – Jockey only	PTEN-J	14 bar	600x230
EN12845 – Jockey + 1 pump	PTEN-J1P	14 bar	600x560
EN12845 – Jockey + 2 pumps	PTEN-J2P	14 bar	600x890
EN12845 – Jockey + 3 pumps	PTEN-J3P	14 bar	600x1220
BS5306 – Jockey only	PTBS-J	14 bar	600x230
BS5306 – Jockey + 1 pump	PTBS-J1P	14 bar	600x400
BS5306 – Jockey + 2 pumps	PTBS-J2P	14 bar	560x600
BS5306 – Jockey + 3 pumps	PTBS-J3P	14 bar	600x890

Only the most popular configurations are shown above; please contact us as we will manufacture any configuration and pressure rating required – we pride ourselves on our responsiveness, flexibility and quality.